

## Syntex Unidur

- Absolutely tough, durable and very abrasion resistant
- Resistance to oil, petrol and a wide range of chemicals
- Temperature range from -40°C up to +100°C
- Resistance to U.V. and ozone
- Low elongation and very low friction loss
- Excellent adhesion between rubber and textile
- No cleaning or drying required


- Municipal fire brigades
- Shipboard, marine and offshore
- Chemical industry
- Refineries, irrigation, agriculture

- 100% high tenacity polyester yarn, circular-woven (reinforcement)
- Embedded in a high-quality, special synthetic rubber on the basis of Nitrile/PVC
- Extruded through the polyester weave

10 m, 15 m, 20 m, 25 m, 30 m, 40 m and other length available upon request

- BS 6391 Type 3
- M.E.D. 96/98/EC
- SETSCO

Internal Diameter		Working Pressure		Bursting Pressure	
Inches	mm	Bar	PSI	Bar	PSI
1 1/2	38	20	290	60	870
2	52	20	290	60	870
2 1/2	65	20	290	60	870

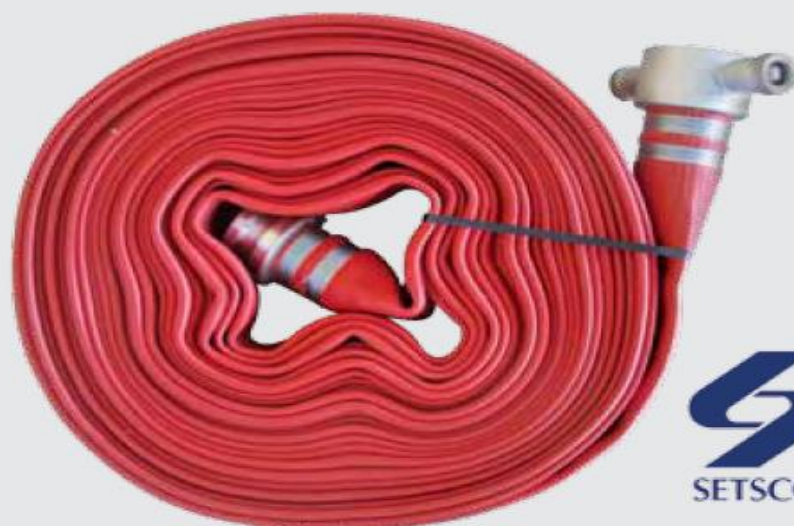

Syntex Unidur