




TECHNICAL SPECIFICATIONS

RAM V3T

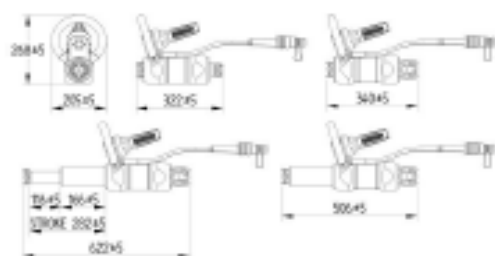

RAM V3T

NEO1 

HP/FF 

Nominal pressure

UltimatePressure™ 350 Bar

UltimatePressure™ 350 Bar

Tailhose safety factor

8:1 (2800 bar)

8:1 (2800 bar)

Dimensions incl detachable rear jaw (L x W x H)

340 x 205 x 268 mm

340 x 205 x 268 mm

Dimensions excl detachable rear jaw (L x W x H)

322 x 205 x 268 mm

322 x 205 x 268 mm

Max. extended length incl detachable rear jaw

622 mm

622 mm

Max. Stroke (hydraulic stroke + added jaw)

282 + 18 mm

282 + 18 mm

Operational weight

12.7 kg

13.4 kg

Max. spreading / pushing force (First stage)

203 kN / 20.7 ton

203 kN / 20.7 ton

Max. spreading / pushing force (Second stage)

91 kN / 9.3 ton

91 kN / 9.3 ton

EN 13204

TR 203/166-91/116-13

TR 203/166-91/116-13

NFPA 1936

Compliant

Compliant

ACCESSORIES

LED light add-on	9500.1000	EX-150	9410.0500.00
Ram support	2350.0535	EX-300	9410.0510.00
Crown	9420.0000		
Rhino	9420.0020		
Multiswivel	9420.0110		
Fixed base	9420.0300		



ENTERPRISE QUAL APPROVED™
ULTIMATE

NFPA-1936
COMPLIANT

EN-13204
COMPLIANT

