




TECHNICAL SPECIFICATIONS

FRONTLINER FX4

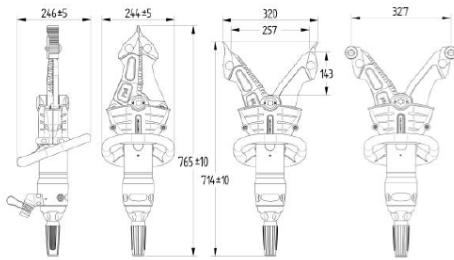

FRONTLINER FX4

NEO1 

HP/FF 

| | | |
|---------------------------------|--|--|
| Nominal pressure | UltimatePressure™ 350 Bar | UltimatePressure™ 350 Bar |
| Tailhose safety factor | - | 8:1 (2800 bar) |
| Dimensions (L x W x H) | 765 x 244 x 246 mm | 765 x 244 x 246 mm |
| Operational weight | 13.8 kg | 14.2 kg |
| Max. cutting opening | 257 mm | 257 mm |
| Reach | 143 mm | 143 mm |
| Max. cutting force | 488 kN / 49.7 ton | 488 kN / 49.7 ton |
| Max. spreading opening | 320 mm | 320 mm |
| Spreading force at base of jaw | 53.0 up to 76.5 kN / 5.4 up to 7.8 ton | 53.0 up to 76.5 kN / 5.4 up to 7.8 ton |
| Spreading force 25 mm from tips | 36.4 up to 40.5 kN / 3.7 up to 4.1 ton | 36.4 up to 40.5 kN / 3.7 up to 4.1 ton |
| Max. pulling opening | 327 mm | 327 mm |
| Pulling force | 43.9 up to 50.2 kN / 4.4 up to 5.1 ton | 43.9 up to 50.2 kN / 4.4 up to 5.1 ton |
| EN 13204 | BK36-320H-14 | BK36-320H-14 |
| NFPA 1936 | A6 B7 C6 D7 E7 | A6 B7 C6 D7 E7 |

ACCESSORIES

| | |
|------------------------------------|-----------|
| LED light add-on | 9500.1000 |
| Chain & shackle set X4 & FX Series | 2305.5000 |
| Pulling Jaw FX2 / FX4 (1pcs) | 2130.4250 |



ULTIMATE™
PRESSURE™

